

Pro Series

Top-Mount and Side-Mount Sand Filters

The very latest in pool filter technology.


Hayward Pro Series sand filters deliver crystal clear water through advanced pool filter technology for pools of all types and sizes. Pro Series sand filters require minimum care and offer smooth, efficient flow and totally balance backwashing. The filters are moulded with corrosion-proof self-cleaning polymeric materials. A versatile seven-position control valve offers both easy operation and maximum efficiency.



Top-Mount



Side-Mount

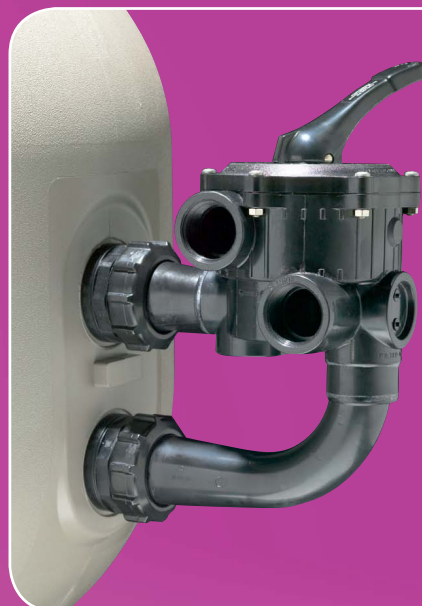

Pro Series Top-Mount Features & Benefits

- Unique folding ball-joint laterals for easy assembly and servicing.
- Large, integral moulded drain plug.
- Automatic air relief to purge any trapped air.
- Corrosion-proof base.
- Integral top diffuser.

Pro Series Side-Mount Features & Benefits

- Hayward 6-Position Vari-Flo Control Valve.
- Manual air relief.

Pro Series Top-Mount	Filtration Area M ²	Flow Rate LPM	Turnover Litres 8-hour	Sand Required (kg)	Dimensions (mm)		Pipe Size (mm)
					Height	Width	
S166TC	0.17	132	63,590	68	889	470	40
S210TC	0.20	165	79,200	90	1041	521	40
S244T2C	0.29	236	113,280	140	1067	622	40/50
S270T2C	0.34	280	134,400	160	1093	686	50
S310T2C	0.46	370	177,600	230	1219	755	50
S360T2C	0.62	503	242,000	318	1350	900	50
Side-Mount							
S244SC	0.29	236	112,280	140	914	622	40
S310SC	0.46	370	177,600	230	1040	775	50

Integral Top Diffuser

ensures even distribution of water over the top of the sand media bed. Full-size internal piping gives smooth, free-flowing performance.

Efficient, Multilateral Underdrain Assembly

with precision-engineered, self-cleaning 360° slotted laterals give totally balanced flow and backwashing.

Integral Moulded Drain Plug

for easy draining of tank, without the loss of sand.

**Flange Clamp Design**

allows 360° rotation of valve to simplify plumbing.

Unitised, Corrosion-Proof Filter Tank

moulded of tough, durable, colourfast polymeric material for dependable, all-weather performance with only minimal care.

Totally Corrosion-Proof Base

is rugged and attractively styled to provide strong, stable support.

Top-Mount

Pro Series Top Mount Features & Benefits

- Flange Clamp Design allows 360° rotation of valve to simplify plumbing.
- Integral Top Diffuser assures even distribution of water over the top of the sand media bed. Full-size internal piping gives smooth, free flowing performance.
- Unitised, Corrosion-Proof Filter Tank moulded of tough, durable, colourfast polymeric material for dependable, all-weather performance with only minimal care.
- Efficient, Multi-Lateral Underdrain Assembly with precision engineered, self-cleaning 360° slotted laterals gives totally balanced flow and backwashing.
- Integral Moulded Drain Plug for easy draining of tank, without the loss of sand.
- Totally Corrosion-Proof Base is rugged & attractively styled to provide strong, stable support.



Vari-Flo™ 7-Position Control Valve with easy-to-use lever-action handle lets you “dial” any of seven valve/filter functions.

Pro Series Top Mount	Filtration Area M ²	Flow Rate LPM	Turnover Litres 8-hour	Sand Required (kg)	Dimensions (mm)		Pipe Size (mm)
					Height	Width	
S166TC	0.17	132	63,590	68	889	470	40
S210TC	0.20	165	79,200	90	1041	521	40
S244T2C	0.29	236	113,280	140	1067	622	40/50
S270T2C	0.34	280	134,400	160	1093	686	50
S310T2C	0.46	370	177,600	230	1219	755	50
S360T2C	0.62	503	242,000	318	1350	900	50